

SERIES 2000 MATERIAL LIFT

SUMNER

Sumner Manufacturing Co, Inc.

Built for Heavy Material & Continuous Work

Series 2000 Features:

- ▶ Lifts up to 1,000 lb (455 kg)
- ▶ 10, 15, 20 and 25 foot heights (3.5, 4.9, 6.3 and 7.7 m)
- ▶ No tools required
- ▶ No loose hardware
- ▶ Mast hold-down secures mast for safe transport

Pulley Guards
Load cable cannot come off.



Reversible Forks

Using plunger pins, forks remove and reverse easily for added height or to get flush with a ceiling. No loose pieces!



Fits through doorways!



Lockable 5" Casters

Hard tread urethane wheels with Delrin® bearings.

Loading Bar

Great for overhead cranes

Roller Wheels

Helps to roll into trucks or vans

Inside-Mast Cable Feed

Cable feeds inside mast, removing exposed cable from near the operator's face.

Sumner-built Winch

Highly reliable, single-speed winch uses idler roller to feed cable evenly on the drum to avoid cable flats. Handles are removable when not in use.

10" Rough Terrain Wheels

Makes loading a truck or van hassle free (optional on Series 2000 Lifts).

Fast Action Stabilizer Legs

Mounted on base top, stabilizer legs fold down with ease and lock in place. Optional on models 2010 & 2015.

 MADE IN USA

Part No.	Description	Max Height		Lifting Capacity		Lift Weight		Shipping Weight	
		Feet	Meter	lb	kg	lb	kg	lb	kg
783700	2010 Material Lift	11' 7-1/8"	3.5	1,000	455	188	85.5	223	104.4
783701	2015 Material Lift	16' 2-1/2"	4.9	800	360	280	127.3	315	143.2
783702	2020 Material Lift	20' 9-3/4"	6.3	800	360	355	161.4	390	177.3
783703	2025 Material Lift	25' 5-1/8"	7.7	650	300	430	195.5	465	211.4

SERIES 2000 MATERIAL LIFT

Available
in optional
galvanized
finish!
(#776270)



One piece slide-lock mechanism releases with plunger pins to fold legs. Leg rollers allow lift to be wheeled around with legs in stored position.



Pipe Cradle (#783705)

- ▶ Great for duct pipe or other HVAC applications.
- ▶ Slides over standard forks.




Fork Extensions (#783691)

- ▶ Push-button operation
- ▶ Extend forks from 28" to 42" (71–106 cm)
- ▶ Longer forks decrease weight capacity to 200 lb (90 kg) (clearly displayed on the forks when extended).

Boom Carriage (#783642)

- ▶ Ideal for installing pipe or other lifting applications.
- ▶ Attaches with four plunger pins
- ▶ 40" (100 cm) reach
- ▶ Five (5) hooking options
- ▶ Load capacity decreases the farther boom is extended, from 650 to 200 lb (300 to 90 kg).

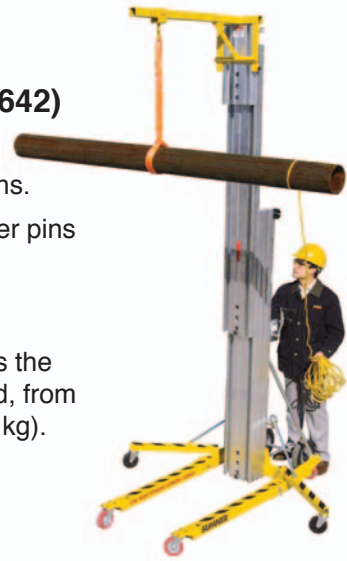

Part No.	Description
783882	Safety brake - 2010
783883	Safety brake - 2015
783884	Safety brake - 2020
783885	Safety brake - 2025

Safety Brake

Each mast and carriage can have a factory installed, gravity actuated safety brake which holds loads in place in the event the cable should go slack.

Series 2000 Material Lift Dimensions	2010		2015		2020		2025	
Height - stowed	6' 4"	1.93 m	6' 4"	1.93 m	6' 4"	1.93 m	6' 4"	1.93 m
Length - stowed	34"	0.86 m	34"	0.86 m	34"	0.86 m	34"	0.86 m
Height - operating	6' 4"	1.93 m	6' 4"	1.93 m	6' 4"	1.93 m	6' 4"	1.93 m
Length - operating	5' 2"	1.57 m	5' 2"	1.57 m	6' 1"	1.84 m	6' 1"	1.84 m
Base width	31-1/4"	0.80 m	31-1/4"	0.80 m	31-1/4"	0.80 m	31-1/4"	0.80 m
Width with stabilizer legs	6' 2"	1.88 m	6' 2"	1.88 m	6' 2"	1.88 m	6' 2"	1.88 m
Ground clearance	2-1/2"	6.4 cm	2-1/2"	6.4 cm	2-1/2"	6.4 cm	2-1/2"	6.4 cm
Load height (minimum)	6"	15.2 cm	6"	15.2 cm	6"	15.2 cm	6"	15.2 cm
Maximum height (forks down)	9' 7-1/2"	2.9 m	14' 2-3/4"	4.3 m	18' 10"	5.7 m	23' 5-3/8"	7.1 m
Maximum height (forks reversed)	11' 7-1/8"	3.5 m	16' 2-1/2"	4.9 m	20' 9-3/4"	6.3 m	25' 5-1/8"	7.7 m

SUMNER

Sumner Manufacturing Co, Inc.

www.sumner.com

DISTRIBUTED BY:

Sumner - U.S. 7514 Alabonson Road • Houston, TX 77088 • Ph: 281-999-6900 • Fax: 281-999-6966

Sumner - Canada 75 Saltsman Drive, Unit 5 • Cambridge, Ontario N3H 4R7 • Ph: 519-653-5300 • Fax: 519-653-5305

Sumner - Netherlands Midden Engweg 21 • NL-3882TS Putten • The Netherlands • Ph: +31 (0) 85 489 0284 • europeansales@sumner.com

Sumner - U.K. Unit 3 Kempton Road • Keytec 7 Business Park • Pershore, Worcestershire WR10 2TA • Ph: (44) 01386 556278 • Fax: (44) 01386 556776