

SR626E

100% ELECTRIC

ELECTRIC COMPACT ROUGH TERRAIN TELEHANDLER



- Zero emission electric compact rough terrain telehandler with lithium-ion batteries
- Full-time 4-wheel drive
- Fully enclosed cab
- Power assisted steering
- Proportional joystick
- Simple to operate & maintain



snorkelTM

www.snorkellifts.com

ELECTRIC COMPACT ROUGH TERRAIN TELEHANDLER

SR626E


CAPABILITIES	SR626E*
Max. lift capacity	2,600kg
Max. lift height (A)	5.79m
Max. forward reach	3.1m

DIMENSIONS	
Overall width (B)	1.89m
Stowed height (C)	1.93m
Length to fork face (D)**	4.19m
Wheelbase	2.5m
Ground clearance	220mm

PERFORMANCE	
Max. drive speed	12km/h
Raise/lower time	6.9/5 sec
Hydraulic flow (per minute)	80L
Hydraulic pressure	230bar
Hydraulic oil capacity	70L
Outside turning radius	3.25m
Tyres	12 x 16.5

POWER	
Power source	Lithium-ion 80V 32kWh batteries
Operating temperature	(-)20°C to (+)45°C
Charger	on-board, single phase

WEIGHT	
Weight	4,800kg

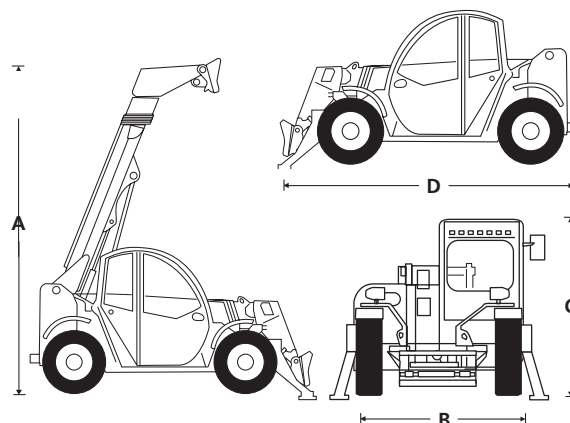


STANDARD FEATURES

- Lithium-ion batteries
- Full-time 4-wheel drive
- 4-wheel steer - selectable front, crab & coordinated
- Auxiliary hydraulic circuit on the boom
- Variable speed hydrostatic drive
- Fully enclosed cab with heat
- Proportional joystick
- Illuminated gauge and switch panels
- Color LCD display with machine & engine diagnostics
- Adjustable suspension seat
- Fixed 1200mm carriage & 1200mm floating forks
- 2000 charging cycles/2 year *** lithium battery warranty
- 2 year parts & labour, 5 year structural warranty
- CE approved

OPTIONS

- Special paint colours
- Euro coupling
- Grammer air suspension seat
- Front & rear LED work lights (4)
- Work lights on boom (2)
- Heated right exterior mirror
- Additional rear mirror
- Cab front glass protection grille
- Non-marking tyres 12-16.5
- Engine preheater 220V
- Boom suspension & floating boom
- Bluetooth radio, handsfree & USB socket
- Sun curtain
- Fixed tow hook 6 ton
- Snorkel OnSite™ telematics

LOAD CHART

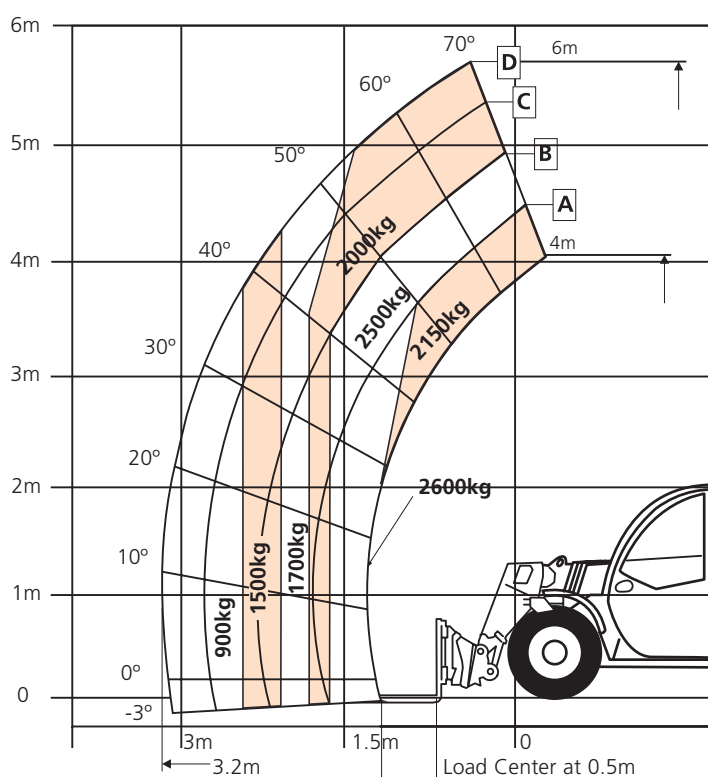

CE Specification
© Snorkel 2022

Specifications subject to change without notice. Photos and diagrams in this brochure are for promotional purposes only. Refer to appropriate Snorkel operators manual for detailed instructions on the proper use and maintenance.

***Whichever comes first. Refer to Snorkel warranty policy for full details, limitations and restrictions. Batteries at the end of their life to be returned to Snorkel for recycling.

**Length to fork face = length from carriage to counter weight.

* Preliminary specifications – confirm at time of ordering.



snorkel

Vigo Centre, Birtley Road,
Washington, Tyne & Wear,
NE38 9DA, U.K.

t: +44 (0) 845 1550 057
e: sales.emea@snorkellifts.com

www.snorkellifts.com

01/2022